


OME005.3A1U1C.2

Standard color



Other colors available with RAL Code

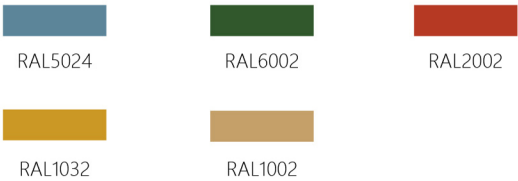

Features

- Three AC outlets, a standard USB-A port and a tech-forward USB-C port for powering all the newest tech devices.
- Smart power distribution technology balances power delivery to devices base on the ports in use, preventing overcharging and short-circuiting.
- Installation option: fixed rectangle hole mounting bracket.

Specifications

Ports	AC Outlets	3xNEMA 5-15R
	USB Ports	1xUSB-A, 1xUSB-C
Cord	Length	5'8" (172.7cm)
Electrical Rating	Input Voltage	120VAC,60Hz,(12A max)
	USB Ports	Connected to one of the two ports 1) USB-A:5V3A,9V2A,12V1.5A (18w max), QC 2.0/3.0 2) USB-C:5V3A,9V2A,12V1.5A (18w max), PD 3.0 Both ports connected USB-A and USB-C: 5V/3A (15W max)
Environmental	Temperature Operating	0°C to 30°C
	Temperature Operating Storage	-10°C to 50°C
Regulatory Compliance	Safety	UL962A, CUL962A

Details

• 3 years,parts only

Certifications

